



Gearboxes for  
**Work Boats**

SVA/SVAL 630 – 1400 | 3,000 – 20,000 kW

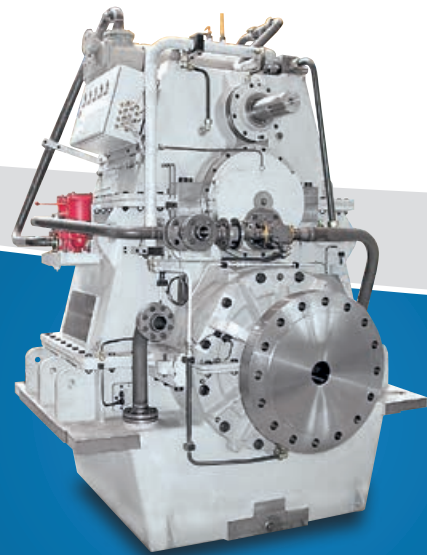

# Applications for Work Boats


## SVA/SVAL 630–1400

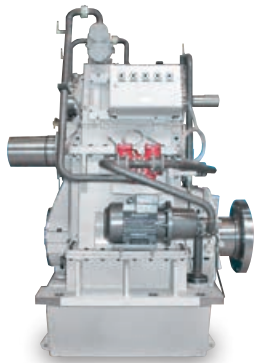


Reduction gearbox with PTO, vertically offset



Reduction gearbox with built-in clutch and PTO/PTH, vertically offset

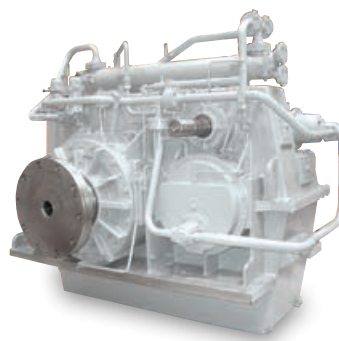

Reduction gearbox with PTO, horizontally offset

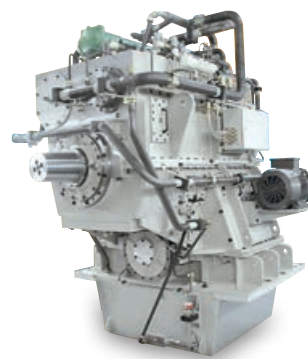

Reduction gearbox with built-in clutch and PTO/PTH, vertically offset

### Advantages

Gearboxes of the SVA and SVAL series have been specially developed for work boats such as tugs, container vessels, freighter, tanker and special-purpose ships with similarly high performance demands.

We have the backing of over 80 years of experience in marine gearbox production and use

state-of-the-art computation tools and production technologies.

Owing to their design for specific areas of deployment, the reduction gearboxes of the SVA series, as well as the reduction gearboxes of the SVAL series with built-in clutch offer various special advantages:

- High operating reliability
- Simple operation and maintenance
- Compact dimensions
- Low operating noise

### Gearbox selection


The selection diagram opposite gives an overview of the performance ratings of the basic SVA and SVAL types.

For the final selection of gearboxes please contact REINTJES.

DESIGNED FOR HEAVY DUTY APPLICATIONS



## Engine power


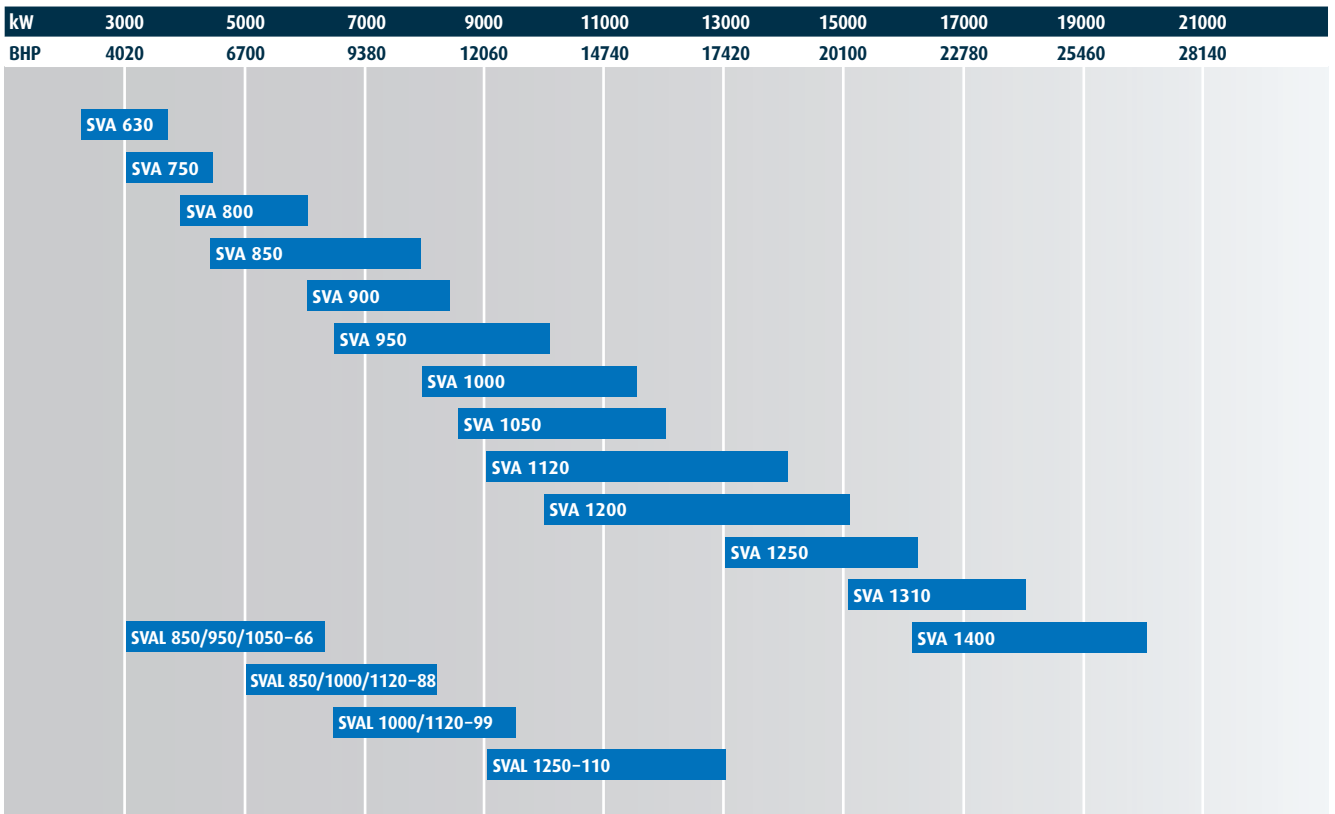


# Marine Gearboxes

## SVA 630 – 1400

### SVA 630 – 1400

Reduction gearbox  
Vertically offset\*

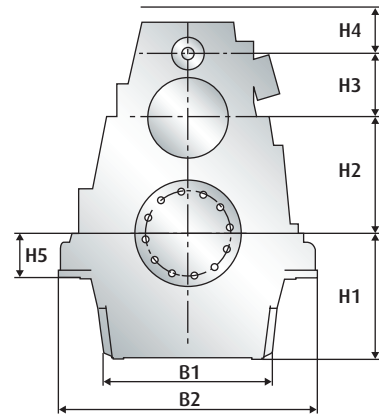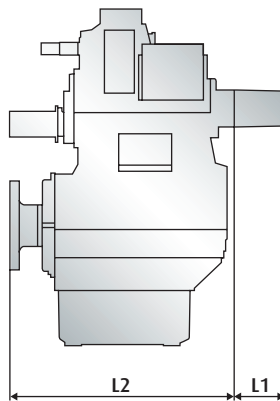



Gearbox	Main Dimensions (mm)									Weight kg <sup>1)</sup>
SVA	B1	B2	H1	H2	H3	H4	H5	L1	L2	
630	1000	1810	790	630	455	550	250	-	1550	7700
750	1198	1870	870	750	500	550	280	-	1663	8900
800	1198	1870	870	800	500	550	280	-	1850	10500
850	1410	2240	1020	850	500	620	390	-	1977	16000
900	1410	2240	1020	900	570	750	390	-	2066	17000
950	1730	2340	1060	950	570	600	350	-	2250	17500
1000	1630	2440	1100	1000	570	650	380	-	2180	19500
1050	1730	2550	1100	1050	570	650	380	-	2180	21000
1120	1730	2560	1150	1120	650	730	380	-	2300	22500
1200	2112	3100	1245	1200	650	750	70	-	2260	31000
1250	1725	3100	1400	1250	650	490	80	-	2504	34000
1310										on request
1400										on request

\*Dimensions of horizontally offset SVA on request.

1) Gearbox standard design (dry). Dimensions and weights not strictly binding. Subject to change.

### Direction of rotation SVA/SVAL



Seen from propeller  
onto engine flywheel  
in direction of travel  
ahead

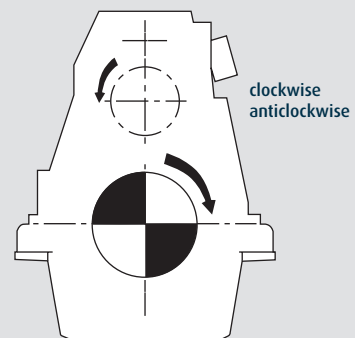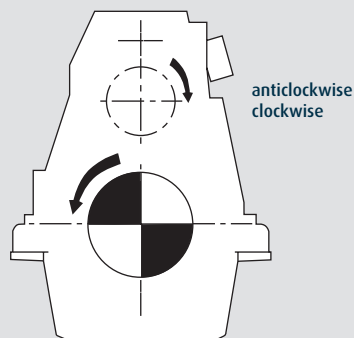



## SVAL 850 – 1250

Reduction gearbox with hydraulically operated clutch.  
Vertically offset\*

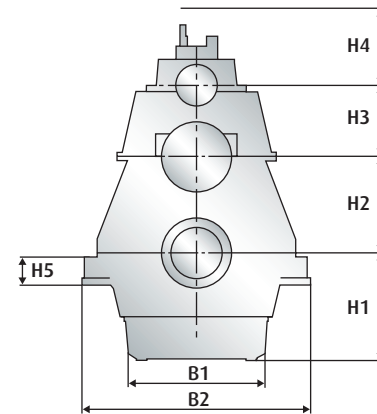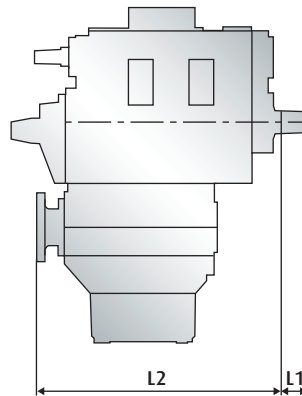


Gearbox SVAL	Main Dimensions (mm)		H1	H2	H3	H4	H5	L1	L2	Weight kg <sup>1)</sup>
	B1	B2								
850-66	-	-	-	850	570	-	-	-	-	-
950-66	1350	2250	1060	950	570	800	320	-	2400	21000
1060-66	-	-	-	1060	570	-	-	-	-	-
850-88	1410	2240	1020	850	630	-	390	-	-	-
1000-88	-	2440	1100	1000	630	-	-	-	-	-
1120-88	1730	2550	1200	1120	630	800	280	-	2800	28000
1000-99	-	2440	1100	1000	690	850	-	-	-	-
1120-99	1720	2550	1300	1120	690	850	280	-	3050	33000
1250-110	1900	3000	1200	1250	750	850	80	-	3325	45000

\*Dimensions of horizontally offset SVAL on request.

1) Gearbox standard design (dry). Dimensions and weights not strictly binding. Subject to change.

### SVA series



Reduction gearbox for propulsion with controllable pitch propeller



Counter rotation of input and output

### SVAL series


Reduction gearbox with built in clutch for propulsion with controllable pitch propeller



Counter rotation of input and output

# Standards

## SVA/SVAL 630 – 1400

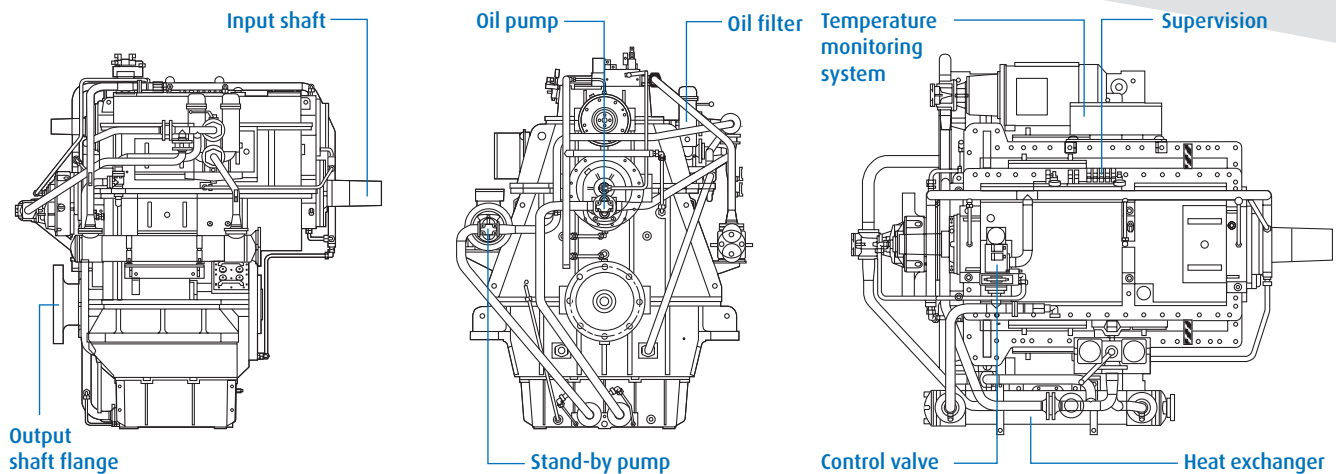

### Basic equipment

- Housing made from grey cast iron or steel in torsion stiff design, rigid mounting
- Spur wheels helically toothed, case hardened and tooth flank ground
- Built-in hydraulically operated disc clutch with steel/sinter friction surface (SVAL only)
- Smooth engagement by adapted pressure increase during shifting (SVAL only)
- The pinion and output shaft are supported in slide bearings. The input shaft with clutch and the PTO shaft are supported in roller bearings

### Scope of supply

#### STANDARD

- Integrated oil sump. Common circuit for operating pressure and lube oil. Oil pump and oil filter accessible from the outside
- Fitted heat exchanger for cooling water inlet temperature of max. 38°C, seawater resistant
- Built-on control valve, electrically operated (SVAL only)
- Emergency control: in case of failure of operating pressure mechanical force locking of the disc clutch is possible (SVAL only)
- Input: free shaft end with taper 1:30
- Output: forged-on-flange

- Supervision
  1. Pressure switch – operating pressure too low pressure switch clutch „on“ „off“ (SVAL only)
  2. Temperature sensor (2xPT100) – oil temperature behind heat exchanger
  3. Temperature supervision system of slide bearings
  4. Filter contamination – electrical signal for “filter contaminated”
  5. Thermometer – oil temperature before and behind heat exchanger
  6. Pressure gauge for operating oil pressure
- Paint coating with synthetic resin varnish in all RAL colours.

#### EXTRAS

- Supervision instruments as per classification rules
- Special PTO executions
- Spare part kit as per classification rules
- Heat exchanger for cooling water temperature higher than 38°C
- Special reduction ratios
- Stand-by pump

Subject to change




# O P T I O N S   A N D   F E A T U R E S



## Options

### SINGLE POWER TAKE OFF (PTO) SINGLE POWER TAKE IN (PTI)

If required, the gearboxes can be fitted with additional Power Take Off (PTO) and Power Take In (PTI).

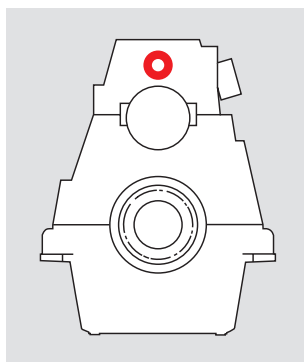


### UNATTENDED MACHINERY SPACE

All gearboxes can be supplied with additional supervision instruments, according to classification society rules, enabling the operator to take all necessary information from the bridge.

### CONDITION MONITORING

Monitoring for all key data for proactive maintenance and management available.

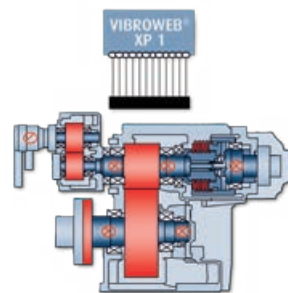


### OD-BOX

For all customary CPP systems, the output shaft can be provided with a centre bore and a connection for the oil distributor box.



### POWER TAKE OFF (PTO)-/ POWER TAKE HOME (PTH)- COMBINATION

Primarily driven PTO in combination with secondary PTH. Different propeller speed for PTH-operation or for operation with main engine possible.

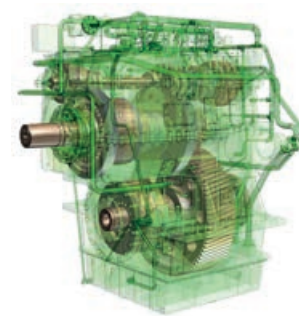

## C Duty cycle classification

### CONTINUOUS DUTY

- Continuous operation with little or no variations in engine speed and power
- Average engine operating hours: unlimited
- Allowable hull forms: semi-displacement, displacement
- Allowable applications: commercial vessels

## Approved quality

Several renowned classification societies have granted REINTJES permission to conduct inspection and approval procedures themselves. In the same way many gearbox types come with a drawing approval or full classification for the main classification societies (IACS members). Since 1990 REINTJES has been certified to DIN ISO 9001/EN 29001.



REINTJES GmbH  
 Eugen-Reintjes-Straße 7  
 31785 Hameln  
 Germany  
 Phone +49 51 51 104-0  
 Fax +49 51 51 104-300  
 E-mail [marine@reintjes-gears.de](mailto:marine@reintjes-gears.de)  
[www.reintjes-gears.de](http://www.reintjes-gears.de)